



KODIAK CONTROLS



MODEL 'KC101D', BOTTOM CONNECTED GAUGE

- An inexpensive utility gauge for the broad commercial and industrial markets.
- Suitable for air, water, oil, gas or any other media not corrosive to brass.
- Other connection locations, mounting styles and accessories available.
- Ready for immediate shipment upon request.

AVAILABLE DIAL SIZES:

1 1/2", 2", 2 1/2", 3 1/2", 4 1/2"

AVAILABLE CONNECTION SIZES:

1/8"NPT on 1 1/2" and 2"Dial Sizes

1/4"NPT on 2" Thru 4 1/2"Dial Sizes

GENERAL SPECIFICATIONS:

Black Steel Case With Chrome Bezel

Brass Socket And Movement

Phosphor Bronze Bourdon Tube

Dry Non-Fillable

3-2-3 % Accuracy

Ambient Temperature: -50 to 160°F




DIAL SCALE:

DUAL SCALE: PSI & BAR (x100=kPa) STANDARD

SINGLE SCALE: PSI ONLY AVAILABLE

OTHER: BY SPECIAL REQUEST

RANGE	CODE	Major Inc.	Minor Inc.
30/0"VAC	A	5" hg	.5" hg
30/0/15	CB	10"hg / 5 psi	1"hg / .5 psi
30/0/30	CC	10"hg / 10 psi	1"hg / 1 psi
30/0/60	CD	10"hg / 10 psi	2"hg / 1 psi
30/0/100	CE	30"hg / 20 psi	5"hg / 2 psi
30/0/150	CF	30"hg / 20 psi	5"hg / 2 psi
30/0/300	CH	30"hg / 50 psi	10"hg / 5 psi
0/15	B	2 PSI	.2 PSI
0/30	C	5 PSI	.5 PSI
0/60	D	10 PSI	1 PSI
0/100	E	20 PSI	2 PSI
0/160	F	20 PSI	2 PSI
0/200	G	40 PSI	5 PSI
0/300	H	50 PSI	5 PSI
0/400	I	50 PSI	5 PSI
0/600	K	100 PSI	10 PSI
0/1000	M	200 PSI	20 PSI
0/1500	N	200 PSI	20 PSI
0/2000	O	400 PSI	50 PSI
0/3000	P	500 PSI	50 PSI
0/5000	R	1000 PSI	100 PSI
0/6000	S	1000 PSI	100 PSI
0/10,000	U	2000 PSI	200 PSI

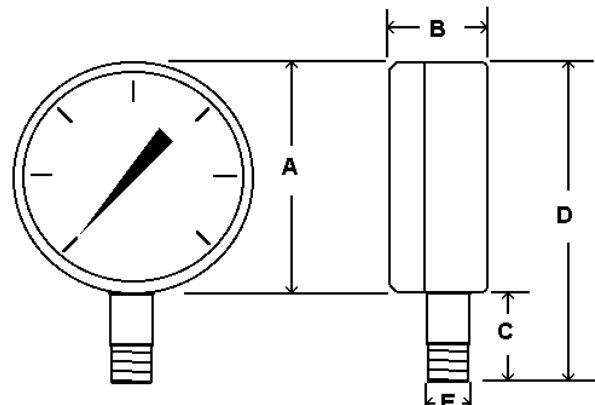

		A	B	C	D	E
1 1/2" Dial	In.	1.64"	.93"	.63"	2.27"	1/8"
	MM	42	24	16	58	MNPT
2" Dial	In.	2.07"	1.03"	.83"	2.90"	1/8" or 1/4"
	MM	53	26	21	74	MNPT
2 1/2" Dial	In.	2.5"	1.17"	.86"	3.36"	1/4"
	MM	63	30	22	26	MNPT
3 1/2" Dial	In.	3.53"	1.14"	1.02"	4.55"	1/4"
	MM	90	29	26	116	MNPT
4 1/2" Dial	In.	4.89"	1.16"	1.16"	6.05"	1/4"
	MM	124	29	30	154	MNPT