



KODIAK CONTROLS



MODEL 'KC103D', PANEL MOUNT GAUGE

A durable Dry type utility gauge designed to look good from the front or back of the panel. These gauges are suitable for air, water, oil, gas or any other media not corrosive to brass. Other connection locations, mounting styles and accessories are also available.

AVAILABLE DIAL SIZES:

1 1/2", 2", 2 1/2", 3 1/2"

AVAILABLE CONNECTION SIZES:

1/8"NPT on 1 1/2" and 2"Dial Sizes

1/4"NPT on 2" Thru 3 1/2"Dial Sizes

GENERAL SPECIFICATIONS:

Chrome Plated Steel Case & Bezel
(Stainless Steel Case Available)

Brass Socket And Movement
Phosphor Bronze Bourdon Tube

Dry Non-Fillable


3-2-3 % Accuracy

Ambient Temperature: -50 to 160°F

DIAL SCALE:

DUAL SCALE: PSI & BAR (x100=kPa) STANDARD

OTHER: BY SPECIAL REQUEST

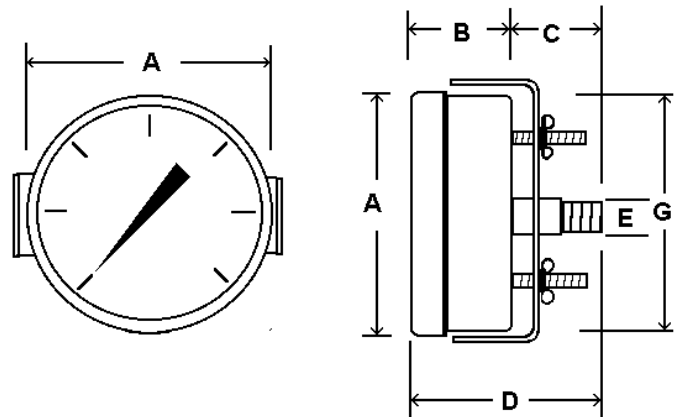

RANGE	CODE	Major Inc.	Minor Inc.
30/0"VAC	A	5" hg	.5" hg
30/0/15	CB	10"hg / 5 psi	1"hg / .5 psi
30/0/30	CC	10"hg / 10 psi	1"hg / 1 psi
30/0/60	CD	10"hg / 10 psi	2"hg / 1 psi
30/0/100	CE	30"hg / 20 psi	5"hg / 2 psi
30/0/150	CF	30"hg / 20 psi	5"hg / 2 psi
30/0/300	CH	30"hg / 50 psi	10"hg / 5 psi
0/15	B	2 PSI	.2 PSI
0/30	C	5 PSI	.5 PSI
0/60	D	10 PSI	1 PSI
0/100	E	20 PSI	2 PSI
0/160	F	20 PSI	2 PSI
0/200	G	40 PSI	5 PSI
0/300	H	50 PSI	5 PSI
0/400	I	50 PSI	5 PSI
0/600	K	100 PSI	10 PSI
0/1000	M	200 PSI	20 PSI
0/1500	N	200 PSI	20 PSI
0/2000	O	400 PSI	50 PSI
0/3000	P	500 PSI	50 PSI
0/5000	R	1000 PSI	100 PSI
0/6000	S	1000 PSI	100 PSI
0/10,000	U	2000 PSI	200 PSI

		A	B	C	D	G	E
1 1/2" Dial	In.	1.82	1.03	.61	1.64	1.59	1/8" or 1/4 MNPT
	MM	46	26	15	42	40	
2" Dial	In.	2.31	1.17	.73	1.90	2.02	1/4 MNPT
	MM	59	30	18.5	48.5	51	
2 1/2" Dial	In.	2.68	1.19	.76	1.95	2.46	1/4 MNPT
	MM	68	30	19	50	63	
3 1/2" Dial	In.	3.97	1.19	.83	2.02	3.59	1/4 MNPT
	MM	101	30	21	51	91	