



SS PROCESS GAUGE MODEL '4501-SC'

STANDARD SPECIFICATIONS:

DIAL:	4 1/2" Diameter
CASE:	Stainless Steel Solid Front/Blow-Out Back
LENS:	Plastic With Gasket
POI NTER:	Micro-Adjustable
BOURDON TUBE:	AISI 316 Stainl ess Steel
SOCKET :	AISI 316 Stainl ess Steel
MOVEMENT:	304 SS Hea vy Duty Bushed
ACCURACY:	0.5 % Full Scale(ANSI Grad e 2A)




STANDARD FEATURES

- *Overload And Underload Stops
- *Hermetically Sealed/Weather Proof
- *Welded Case and Connection
- *Liquid Fillable / No Kit Req uired
- *Best Product Best Price Best Value !!*

Ranges:

RANGE	COD E	Major In	Minor In
30/0"VAC	A	5	0.5
30/0/15	CB	5	0.5
30/0/30	CC	10	1
30/0/60	CD	10	1
30/0/100	CE	20	2
30/0/150	CF	20	2
30/0/300	CH	50	10
0/15	B	2	0.2
0/30	C	5	0.5
0/60	D	10	1
0/100	E	20	2
0/160	F	20	2
0/200	G	40	4
0/300	H	50	5
0/400	I	50	5
0/500	J	100	10
0/600	K	100	10
0/800	L	100	10
0/1000	M	200	20
0/1500	N	200	20
0/2000	O	400	50
0/3000	P	500	50
0/4000	Q	500	50
0/5000	R	1000	100
0/6000	S	2000	200
0/10,000	U	2000	200
0/15,000	V	2000	200

Dimensions:

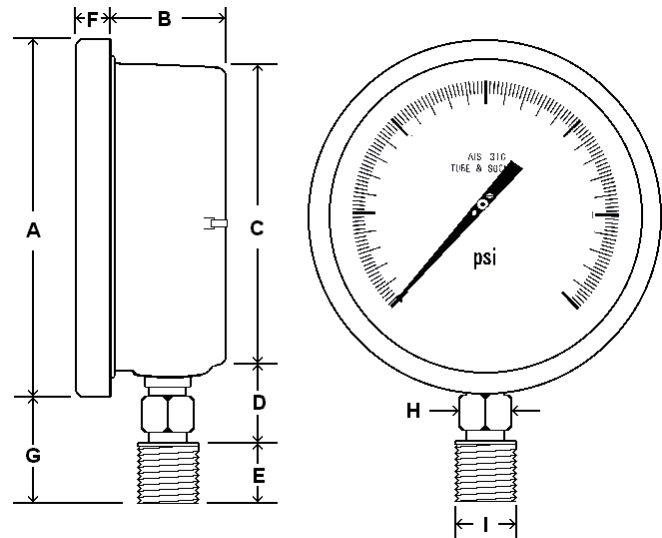

	INCHES	mm
A	5.42"	138
B	1.62"	41
C	4.75"	120
D	1.10"	28
E	.81"	20
F	.61"	15.5
G	1.50"	38
H	.75"	19
I (NPT)	1/4" or 1/2"	

Kodiak Controls, Inc.
125 S. Lombard Rd
Addison, IL 60101

Telephone: (630) 629-37 33

Web: www.kodiakcontrols.com

Fax: (630) 6 29-3544

Email: KCIBear@AOL.com